



**Innovate
for a Green Future** ~~2026~~



Location: Suzhou, China



Contact Us: info@dunext.com

©2026 Dunext Technology Suzhou Co., Ltd. All rights reserved.

CONTENTS

1



2



3



Company



Product



Partner

INNOVATE FOR A GREEN FUTURE

ABOUT DUNEXT

Dunext is a leading provider of one-stop C&I and utility-scale energy storage solutions. With strong capabilities across R&D, manufacturing, and sales, we are driven by technological innovation and committed to delivering intelligent, efficient, safe, and reliable solutions and products to customers worldwide.

Our advanced production facilities include PACK assembly and BESS integration lines with an annual capacity of 10 GWh for PACK production and 5 GWh for system integration. To date, we have delivered over 3 GWh of energy storage systems globally, supporting more than 100 clients with comprehensive solutions and services.

Guided by a global strategy, Dunext has established five overseas subsidiaries and offices, empowering businesses around the world to accelerate their energy transition and build a sustainable, green future together.

BUSINESS DEVELOPMENT LAYOUT



HQ

Suzhou, China

EMEA

UK / Netherlands
Germany / Poland
Romania / Austria
Bulgaria / Italy

Asia

Singapore

Africa

Nigeria

America

USA (TBE)
Brazil (TBE)

PRODUCT CATALOG

Dunext Solution

ESS

Integrated Outdoor Battery Energy Storage Cabinet

PowerHill (261kWh)-Liquid Cooling	09-10
PowerHill (233kWh)-Liquid Cooling	11-12
PowerHill (143kWh-215kWh)-Air Cooling	13-14

Outdoor Hybrid ESS

PowerRock Series	15-16
------------------	-------

Indoor Rack-Mounted ESS

PowerRack Series	17-18
------------------	-------

Containerized Battery Energy Storage System

PowerMount (2MWh)	19-20
PowerMount (2.25MWh)	21-22
PowerMount (5MWh)	23-24

Power Control Cabinet

PCC-3/1	25-26
PCC-3/1-S2	27-28
PCC-1/1-S1	29-30

Hybrid Inverter

Three Phase Hybrid Inverter

DN3H Series (25-50KTL)	31-32
DN3H-H3 Series (25-50K)	33-34

EMS

Energy Management System

DN-EMS300	35-36
-----------	-------




Dunext Solution


Commercial & Industrial PV+ESS Solution

Utility Scale ESS Solution

Commercial & Industrial PV + ESS Solution

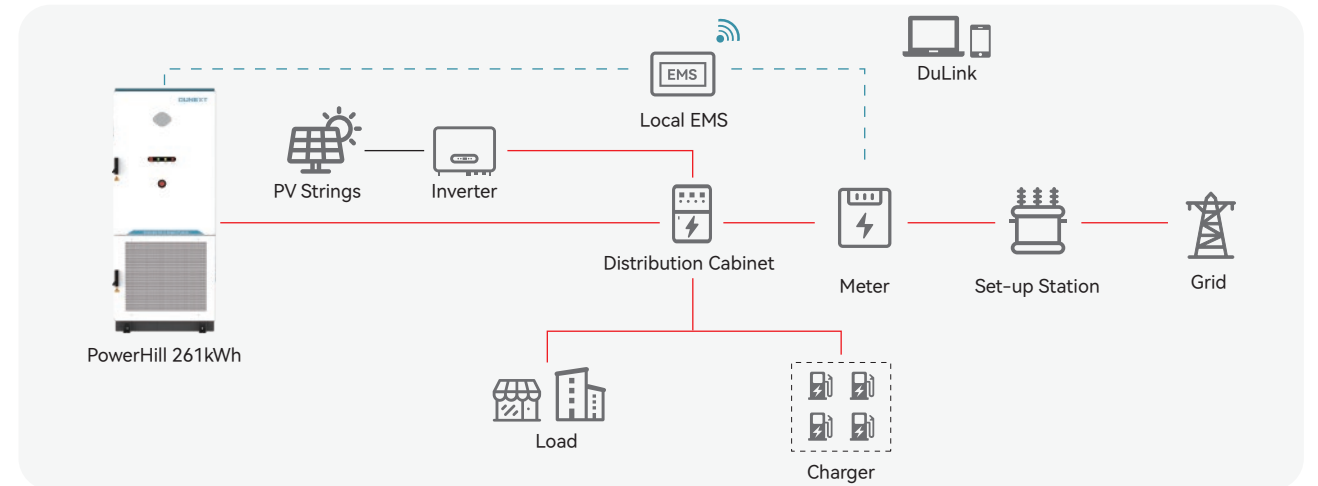

Utility Scale ESS Solution

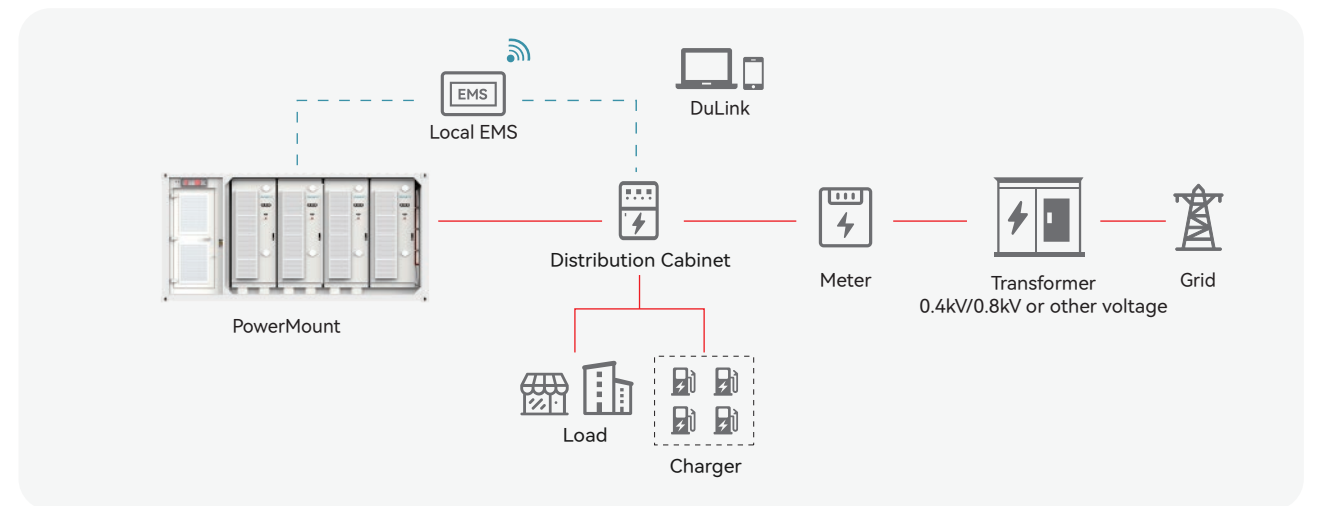

— DC — AC — Communication



PowerHill (261kWh) -Liquid Cooling

Integrated Outdoor Battery Energy Storage Cabinet

- 314Ah large-capacity cells
- Six-layer ultimate safety design
- Efficient liquid cooling, cell temperature difference <2.5°C
- Max parallel operation of 10 units
- No need to replace liquid coolant for 10 years
- Local EMS & Smart O&M cloud platform

Integrated Outdoor Battery Energy Storage Cabinet		PowerHill (261kWh)-Liquid Cooling
Model	PowerHill-P125-261kWh-S2	
		Battery
Cell Type	LiFePO4-314Ah	
Pack Configuration	5 * (1P52S)	
Battery Capacity [kWh]	261	
Cycle Life	8000 Cycles @70% EOL	
		AC Output
Connection Type	3P4W	
Charging / Discharging Power [kW]	125	
Rated Grid Voltage [V]	220/380; 230/400	
Frequency [Hz]	50	
Rated AC Output Current [A]	181	
Adjustable Power Factor Range	-1~1	
		Backup Output (Off-Grid)
Connection Type	3P4W	
Rated Output Power [kW]	125	
Rated Output Voltage [V]	220 / 380; 230 / 400	
Output Frequency [Hz]	50	
Max. Current [A]	200	
		General Parameters
Dimensions [W * H * D] [mm]	1026 * 2366 * 1350	
Weight [kg]	About 2800	
Degree of Protection	IP 55	
Cooling	Liquid Cooling	
Fire Suppression System	Smoke sensor, Temperature sensor, Air inlet / Exhaust, Aerosol	
Anti-Corrosion Grade	C4 (Optional C5)	
Relative Humidity	0 ~ 100% (Non - Condensing)	
Operating Temperature [°C]	-25~55 (> 45 derated)	
Altitude [m]	4000 (> 2000 derated)	
Noise Level [dB(A)]	≤ 70	
Communication Interface	Ethernet	
Communication Protocol	MQTT, Modbus TCP	
		Certifications & Standards
Certifications	IEC 62619 , IEC 61000 , IEC 63056 , IEC 60730-1 , IEC 62477-1 , IEC 60529 , UN38.3	



PowerHill (233kWh) –Liquid Cooling

Integrated Outdoor Battery Energy Storage Cabinet

- Six-layer safety design
- Supports parallel operation of up to 10 units
- Efficient liquid cooling, cell temperature difference < 2.5°C
- Constant power output from 0-100% SOC
- No need to replace liquid coolant for 10 years
- Local EMS & Smart O&M cloud platform

Integrated Outdoor Battery Energy Storage Cabinet		PowerHill (233kWh)–Liquid Cooling
Model	PowerHill-P105-233kWh	
		Battery
Cell Type	LiFePO4-280Ah	
Pack Configuration	5* (1P52S)	
Battery Capacity [kWh]	233	
Cycle Life	8000 Cycles @70% EOL	
		AC Output
Connection Type	3P4W	
Rated Charging / Discharging Power [kW]	105	
Rated Grid Voltage [V]	220 / 380; 230 / 400	
Frequency [Hz]	50	
Rated AC Output Current [A]	152	
Adjustable Power Factor Range	-1 ~ 1	
Output THDi [@Rated Output]	≤ 3%	
		Backup Output (Off-Grid)
Connection Type	3P4W	
Rated Output Power [kW]	105	
Rated Output Voltage [V]	220 / 380; 230 / 400	
Output Frequency [Hz]	50	
Max. Current [A]	167	
THDu [@Rated Output]	≤ 3%	
		General Parameters
Dimensions [W * H * D] [mm]	1390 * 2380 * 1350	
Weight [kg]	2810	
Degree of Protection	IP54 (IP66 for Battery Compartment)	
Cooling	Liquid Cooling	
Fire Suppression System	Smoke Sensor, Temperature Sensor, Air Inlet / Exhaust, Aerosol	
Relative Humidity	0 ~ 100% (Non - Condensing)	
Operating Temperature [°C]	-25 ~ 55 (>45 Derated)	
Altitude [m]	2000	
Noise Level [dB(A)]	≤ 70	
Communication Interface	Ethernet, Optical Fiber (Optional)	
Communication Protocol	Modbus TCP, IEC 104, MQTT	
		Certifications & Standards
System	UN38.3, IEC 62619, IEC 63056, EN 61000, IEC 60730, IEC / EN 62109, IEC / EN 62477-1, CEI 0-21, CEI 0-16	
Converter	G99, G100, VDE 4105, VDE 4110, EN50549, NC RFG TypeA TypeB	



PowerHill (143kWh-215kWh) -Air Cooling

Integrated Outdoor Battery Energy Storage Cabinet

- Plug-and-play, all-in-one design
- Support solar, generator, wind turbine accessing
- Up to 100% unbalanced loads operation
- Multi grid auxiliary service application
- Five-layer safety design
- Higher availability with modular design & O&M cloud platform

Integrated Outdoor Battery Energy Storage Cabinet				PowerHill (143kWh-215kWh)-Air Cooling				
Model	PowerHill P30-143kWh	PowerHill P30-179kWh	PowerHill P50-215kWh	PowerHill P60-143kWh	PowerHill P60-161kWh	PowerHill P60-179kWh	PowerHill P60-215kWh	PowerHill P100-215kWh
Battery								
Cell Type	LiFePO4-280Ah							
Pack Configuration	1P20S							
Cycle Life	8000 Cycles @70% EOL							
Battery Capacity [kWh]	143.36	179.2	215.04	143.36	161.2	179.2	215.04	215.04
AC Output								
Connection Type	3P4W							
Charging / Discharging Power [kW]	30		50	60			100	
Rated Grid Voltage [V]	220 / 380; 230 / 400							
Frequency [Hz]	50 / 60							
Rated AC Output Current [A]	43		72	86			144	
Adjustable Power Factor Range	0.8 Leading ... 0.8 Lagging							
Output THDi [@Rated Output]	≤ 3%							
Backup Output (Off-Grid)								
Connection Type	3P4W							
Rated Output Power [kW]	30		50	60			100	
Rated Output Voltage [V]	220 / 380; 230 / 400							
Output Frequency [Hz]	50 / 60							
Rated Current [A]	43		72	86			144	
Frequency Accuracy [Hz]	0.2							
General Parameters								
Dimensions [W * H * D] [mm]	1686 * 2093 * 1354							
Weight [kg]	2500							
Display	HMI							
Degree of Protection	IP55 (Battery Cabinet), IP54 (Electrical Cabinet)							
Cooling	Battery Cabinet (Air Conditioner)							
Fire Suppression System	Combustible Gas Detection + Novec1230 + Water Fire Protection							
Anti-Corrosion Grade	C3							
Relative Humidity	0 ~ 95% (Non - Condensing)							
Operating Temperature [°C][1]	-30 ~ 50							
Altitude [m][2]	< 2000							
Noise Level [dB(A)]	≤ 75							
Communication Interface	RS485, Ethernet							
Communication Protocol	Modbus RTU, Modbus TCP / IP							
PV Side Parameters (Optional)								
Max. PV Input Power [kW]	30		60			60 / 120		
Max. PV Input Voltage Range [V]	200 ~ 750		200 ~ 650	200 ~ 750			200 ~ 650	
Number of MPPTs	1		1			1 / 2		
Number of PV Inputs	1		1			1 / 2		
Max. Input Current [A]	100		200			200 / 400		
Certifications & Standards								
System	CE (IEC 61000, IEC 62477), IEC 62109, IEC 62619, UN 3480, CEI 0-21, CEI 0-16, VDE 2510							
Converter	G99, G100, VDE 4105, EN50549, CE (IEC 61000, IEC 62477), IEC 62109, NC RfG, VDE 4110							
PACK	UN 38.3							
Cell	IEC 62619, UL 1973, UL 1642, UL 9540A							

[1] The system will be derated when the ambient temperature exceeds 45°C.
[2] The system will be derated when the altitude is above 2000m.



PowerRock Series

Outdoor Hybrid ESS

- 150A high charge/discharge current
- Supports DC coupling
- Comprehensive multi-layer safety
- Wall-mounted all-in-one design
- Intelligent remote O&M
- Smart loads management

Outdoor Hybrid ESS

Outdoor Hybrid ESS		PowerRock + DN3H-H3	
Model	PowerRock-100kWh + DN3H-25K-H3	PowerRock-86kWh + DN3H-40K-H3	PowerRock-100kWh + DN3H-50K-H3
PV Input			
Max. Recommended PV Power [Wp]	50000	80000	100000
Max. PV Input Voltage [V]		1000	
Start-Up Voltage [V]		135	
Rated PV Input Voltage [V]		620	
Operating Voltage Range [V]		200~950	
No. of MPP Trackers		4	
No. of Input Strings per Tracker		2	
Max. Input Circuit per MPPT [A]		40	
Max. Short-Circuit Current per MPPT [A]		50	
AC Input / Output (On-Grid)			
Rated Output Power [W]	25000	40000	50000
Max. Output Current [A]	37.9	60.6	75.8
Rated AC Voltage [V]	3L / N / PE, 220 / 380; 230 / 400; 240 / 415		
Rated Frequency [Hz]	50 / 60		
Adjustable Power Factor [cos ϕ]	0.8 Leading ... 0.8 Lagging		
THDi [@Rated Power]	< 3%		
Max. Input Power from Grid [W]	50000	80000	80000
Max. Input Current [A]	75.8	121.2	121.2
AC Output (Off-Grid)			
Rated Output Power [W]	25000	40000	50000
Max. Output Current [A]	37.9	60.6	75.8
Rated AC Voltage [V]	3L / N / PE, 220 / 380; 230 / 400; 240 / 415		
Rated Frequency [Hz]	50 / 60		
Peak Output Apparent Power [VA]	1.5 Times of Rated Output Power,10s		
Automatic Switch Time [ms]	< 10		
Voltage Harmonic Distortion	< 3% @Linear load		
Battery			
Cell Type [Ah]	LiFePO4~280		
Pack Configuration	(1P16S) 7S	(1P16S) 6S	(1P16S) 7S
Battery Capacity [kWh]	100	86	100
Rated Battery Voltage [V]	358.4	307.2	358.4
Battery Voltage Range [V]	324.8~403.2	278.4~345.6	324.8~403.2
Max. Charging / Discharging Current [A]	150		
Max. Charging Power [W]	25000	40000	50000
Max. Discharging Power [W]	25000	40000	50000
General Parameters			
Dimension [W*H*D] [mm] ^[1]	1061 * 2333 * 1222		
Weight [kg] ^[1]	1389 ± 100	1289 ± 100	1389 ± 100
Operating Temperature [°C]	-20 ~ 50 (> 45°C Derating)		
Relative Humidity	0 ~ 95% RH (Non-Condensing)		
Altitude [m]	3000 (> 2000m Derating)		
Cooling	Inverter (Fan); Battery Cabinet (Air Conditioner)		
Degree of Protection	Inverter: IP66; Battery Cabinet: IP55		
Fire Suppression System	Aerosol		
Topology	Transformerless		
Certificates			
Certifications	IEC 62619, IEC 63056, IEC 61000, IEC62477-1, UN 38.3, IEC 62109 EN 50549, G99, G100, NC RFG Type A ,TOR Type A		

[1] Dimensions and weight measured with inverter included.

PowerRack Series



Indoor Rack-Mounted ESS

- ✓

Wide voltage range
- 🔋

Modular design, easy installation
- 🛡️

High safety LFP & smart BMS
- ⚡

High system efficiency
- 📏

Expandable, capacity up to 76.8kWh per cluster
- 🏢

Adaptive for various commercial scenarios

Indoor Rack-Mounted ESS

PowerRack Series

Model	PowerPack-5.12HV
Electrical Parameters	
Battery Type	LiFePO4
Nominal Battery Energy [kWh]	5.12
Nominal Capacity [Ah]	100
Nominal Voltage [V]	51.2
General Parameters	
Net Weight [kg]	43.5
Dimension [W * D * H] [mm]	481 * 535 * 140
Charging Temperature Range [°C]	0 ~ 55
Discharging Temperature Range [°C]	-10 ~ 55
Communication	CAN
Cycle Life ^[1]	> 6000 Cycles
Degree of Protection	IP20
Expansion	Up to 15 Units in Series
Certification & Safety Standard	UN 38.3 / CE-EMC

[1] Test conditions: 0.2C Charging / Discharging, @25°C, 95% DOD.

Model	PowerRack 0.5C Series		
	Electrical Parameters		
Rack Type	PowerRack-35.8kWh	PowerRack-51.2kWh	PowerRack-56.32kWh
Battery Module Type	PowerPack-5.12HV	PowerPack-5.12HV	PowerPack-5.12HV
Nominal Battery Energy [kWh]	35.84	51.2	56.32
Nominal Capacity [Ah]	100	100	100
Nominal Voltage [V]	358.4	512	563.2
Operating Voltage Range [V]	313.6 ~ 403.2	448 ~ 576	492.8 ~ 633.6
Nominal Power Output [kW]	21.5	30.72	33.79
Max.Power Output [kW]	35.84	51.2	56.32
Recommend Charging Current [A]	50	50	50
Recommend Discharging Current [A]	50	50	50
	General Parameters		
Battery Module Quantity	7 Units	10 Units	11 Units
Net Weight [kg]	397.5	593	646.5
Dimension [W * D * H] [mm]	548 * 568 * 1412	548 * 568 * 2012	548 * 568 * 2012
Rack System Control Unit Type ⁽¹⁾	BDU-200	BDU-200	BDU-200
Module Quantity and Configuration	7 Units in Series	10 Units in Series	11 Units in Series

[1] PowerPack-5.12HV battery module need to be used with BDU-200 control unit.

PowerMount (1505-2007kWh)



Containerized Battery Energy Storage System

-  All-in-One Design
-  Multi-Layer Safety Design
-  Dual Fire Suppression Systems
-  Independent Single-Cluster Management
-  Pre-installed & Easy Connection
-  Modular Design for Flexible Configuration

Containerized Battery Energy Storage System PowerMount (1505-2007kWh)

Model	PowerMount -P720-1505kWh	PowerMount -P480-2007kWh	PowerMount -P960-2007kWh
Battery			
Cell Type	LiFePO4 - 280Ah		
System Configuration	6 * 1P280S	8 * 1P280S	8 * 1P280S
Battery Capacity [kWh]	1505.28	2007.04	2007.04
AC Output			
Rated Output Power [kW]	720 (12 * 60)	480 (8 * 60)	960 (16 * 60)
Rated Voltage [V]	400, 3P4W+PE		
Frequency [Hz]	50 / 60		
Rated Current [A]	1039	693	1386
Harmonics	< 3% (@Rated Power)		
Cycle Life	8000 cycles @25°C		
Overload Capacity	110%, Continuous		
General Parameters			
Isolation Transformer	No		
Degree of Protection	IP 54		
Anti-Corrosion Grade	C3		
Operating Temperature [°C] ^[1]	-30 ~ 50		
Relative Humidity	0~95% (Non-Condensing)		
Operating Altitude [m] ^[2]	< 3000		
Noise Emission [dB(A)]	≤ 75		
Dimension [W * D * H] [mm]	20HQ Container (6058 * 2438 * 2896)		
Max. Weight [kg]	About 21500	About 26500	
Fire Fighting System	Water Fire Protection+Novtec1230		
Communication Interface and Protocol	Ethernet, Modbus TCP		
Certifications & Standards			
Certifications	IEC 61000, IEC 62477, IEC 62619, ROHS, UN3536		
	IEC 62619, UL 1973, UL 9540A, UL 1642		
	EN 50549, VDE 4105, VDE 4110, NC-RFG,TOR-TypA and B, G99		

[1] The system will be derated when the ambient temperature exceeds 45°C.

[2] The system will be derated when the altitude exceeds 2000m.



PowerMount -P960-2250kWh

Containerized Battery Energy Storage System

- 

314Ah large-capacity cells
- 

Multi-Layer Safety Design
- 

Dual Fire Suppression Systems
- 

Independent Single-Cluster Management
- 

All-in-One Design
- 

Modular Design for Flexible Configuration

Containerized Battery Energy Storage System

PowerMount-P960-2250kWh

Model	PowerMount-P960-2250kWh
Battery	
Cell Type	LiFePO4 - 314Ah
System Configuration	8 * 1P280S
Battery Capacity [kWh]	2250.75
AC Output	
Rated Output Power [kW]	960 (16 * 60)
Rated Voltage [V]	400, 3P4W+PE
Frequency [Hz]	50 / 60
Rated Current [A]	1386
Harmonics	< 3% (@Rated Power)
Overload Capacity	110%, Continuous
General Parameters	
Isolation Transformer	No
Degree of Protection	IP 54
Anti-Corrosion Grade	C3
Operating Temperature [°C] [1]	-30 ~ 50
Relative Humidity	0~95% (Non-Condensing)
Operating Altitude [m] [2]	< 3000
Noise Emission [dB(A)]	≤ 70
Dimension [W * D * H] [mm]	20HQ Container (6058 * 2438 * 2896)
Max. Weight [kg]	About 26500
Fire Fighting System	Water Fire Protection+Novec1230
Communication Interface and Protocol	Ethernet, Modbus TCP
Certifications & Standards	
Certifications [3]	IEC 61000, IEC 62477, IEC 62619, UN3536
	IEC 62619, UL 1973, UL 9540A, UL 1642
	EN 50549, VDE 4105, VDE 4110, NC-RFG,TOR-TypA and B, G99

[1] The system will be derated when the ambient temperature exceeds 45°C.
[2] The system will be derated when the altitude exceeds 2000m.



PowerMount (5MWh)

Containerized Battery Energy Storage System

- Ultra-high energy density
- Multi-level safety protection system
- Excellent thermal management to maintain the battery temperature difference $\leq 3^{\circ}\text{C}$
- Versatile application in multiple scenarios
- Flexible Configuration, support back-to-back layout
- Refined management of BMS to extend battery service life

Containerized Battery Energy Storage System

PowerMount (5MWh)

Model	PowerMount-5MWh-S2
Battery	
Cell Type	LiFePO4 – 314Ah
Battery Capacity [kWh]	5015
Battery Rated Voltage [V]	1331.2
Battery Voltage Range [V]	1164.8~1497.6
Standard Charging / Discharging Power [kW]	2500
Efficiency	
System Efficiency	$\geq 94\%$
General Parameters	
Degree of Protection	IP65 (IP55 Optional)
Operation Temperature [°C]	-20°C~+50°C
Relative Humidity	< 95%
Permissible Altitude [m]	≤ 3000 (> 2000m, de-rating)
Cooling Method	Liquid Cooling
Fire Fighting System	Aerosol+Water Spray
Dimension [W*D*H] [mm]	6058 * 2438 * 2896
Weight [kg]	42500
Communication Interface	Ethernet/RS485/CAN
Communication Protocol	Modbus TCP/Modbus RTU / CAN2.0
Certifications & Standards	
Certifications	IEC/EN 62619, IEC/EN 61000, IEC 63056, IEC/EN 62477 IEC 62933-5-2, UL 9540A, UN 38.3, UN 3536



PCC-3/1

Power Control Cabinet

- On/off-grid switching time < 20 ms
- Supports up to 3 energy storage cabinets
- Easy installation and maintenance
- No isolation transformer required
- IP54 outdoor design
- Integrated bypass switch for uninterrupted and safe load power supply

Power Control Cabinet


PCC-3/1


Model	PCC-3/1
Electrical Parameters	
Grid Connection	3P4W + PE
Rated Grid Voltage [VAC]	400
Rated Frequency [Hz]	50
Automatic Switching Time [ms]	≤ 20
Rated Output Current [A]	722
Max. Efficiency	0.99
Grid Input Power [kW]	500
BESS Input Power [kW]	105 * 3
Load Power [kW] ^[1]	≤ 300
Protection	
Grid-Side Overvoltage	Yes
Undervoltage	Yes
Overfrequency	Yes
Underfrequency	Yes
Overtemperature	Yes
Emergency Stop and Output Overload Protection	Yes
General Data	
Dimension [W*D*H][mm]	1390 * 1350 * 2380
Max. Weight [kg]	1000
Degree of Protection	IP54
Cooling	Fan
Ambient Temperature Range [°C] ^[2]	-20 ~ 55
Relative Humidity [%]	0~95 (No condensing)
Operating Altitude [m] ^[3]	≤ 4000
Communication Interface	1 RS485
Communication Protocol	Modbus-RTU
Number of Grid Inputs	1
Number of PCS Inputs	1
Number of Load Inputs	1

[1] To be determined by the access power of the industrial and commercial energy storage system.

[2] The system power derates above 45°C.

[3] The system derates above 2000 meters.

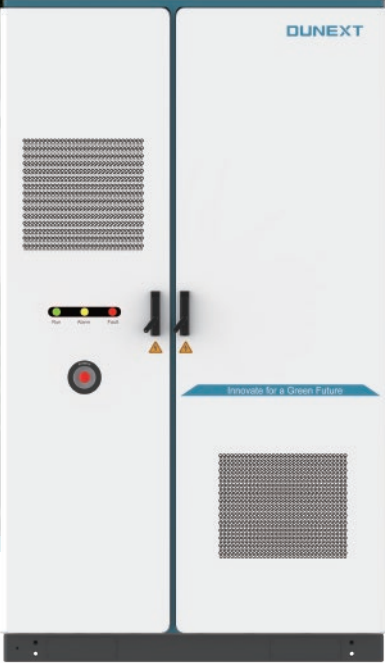

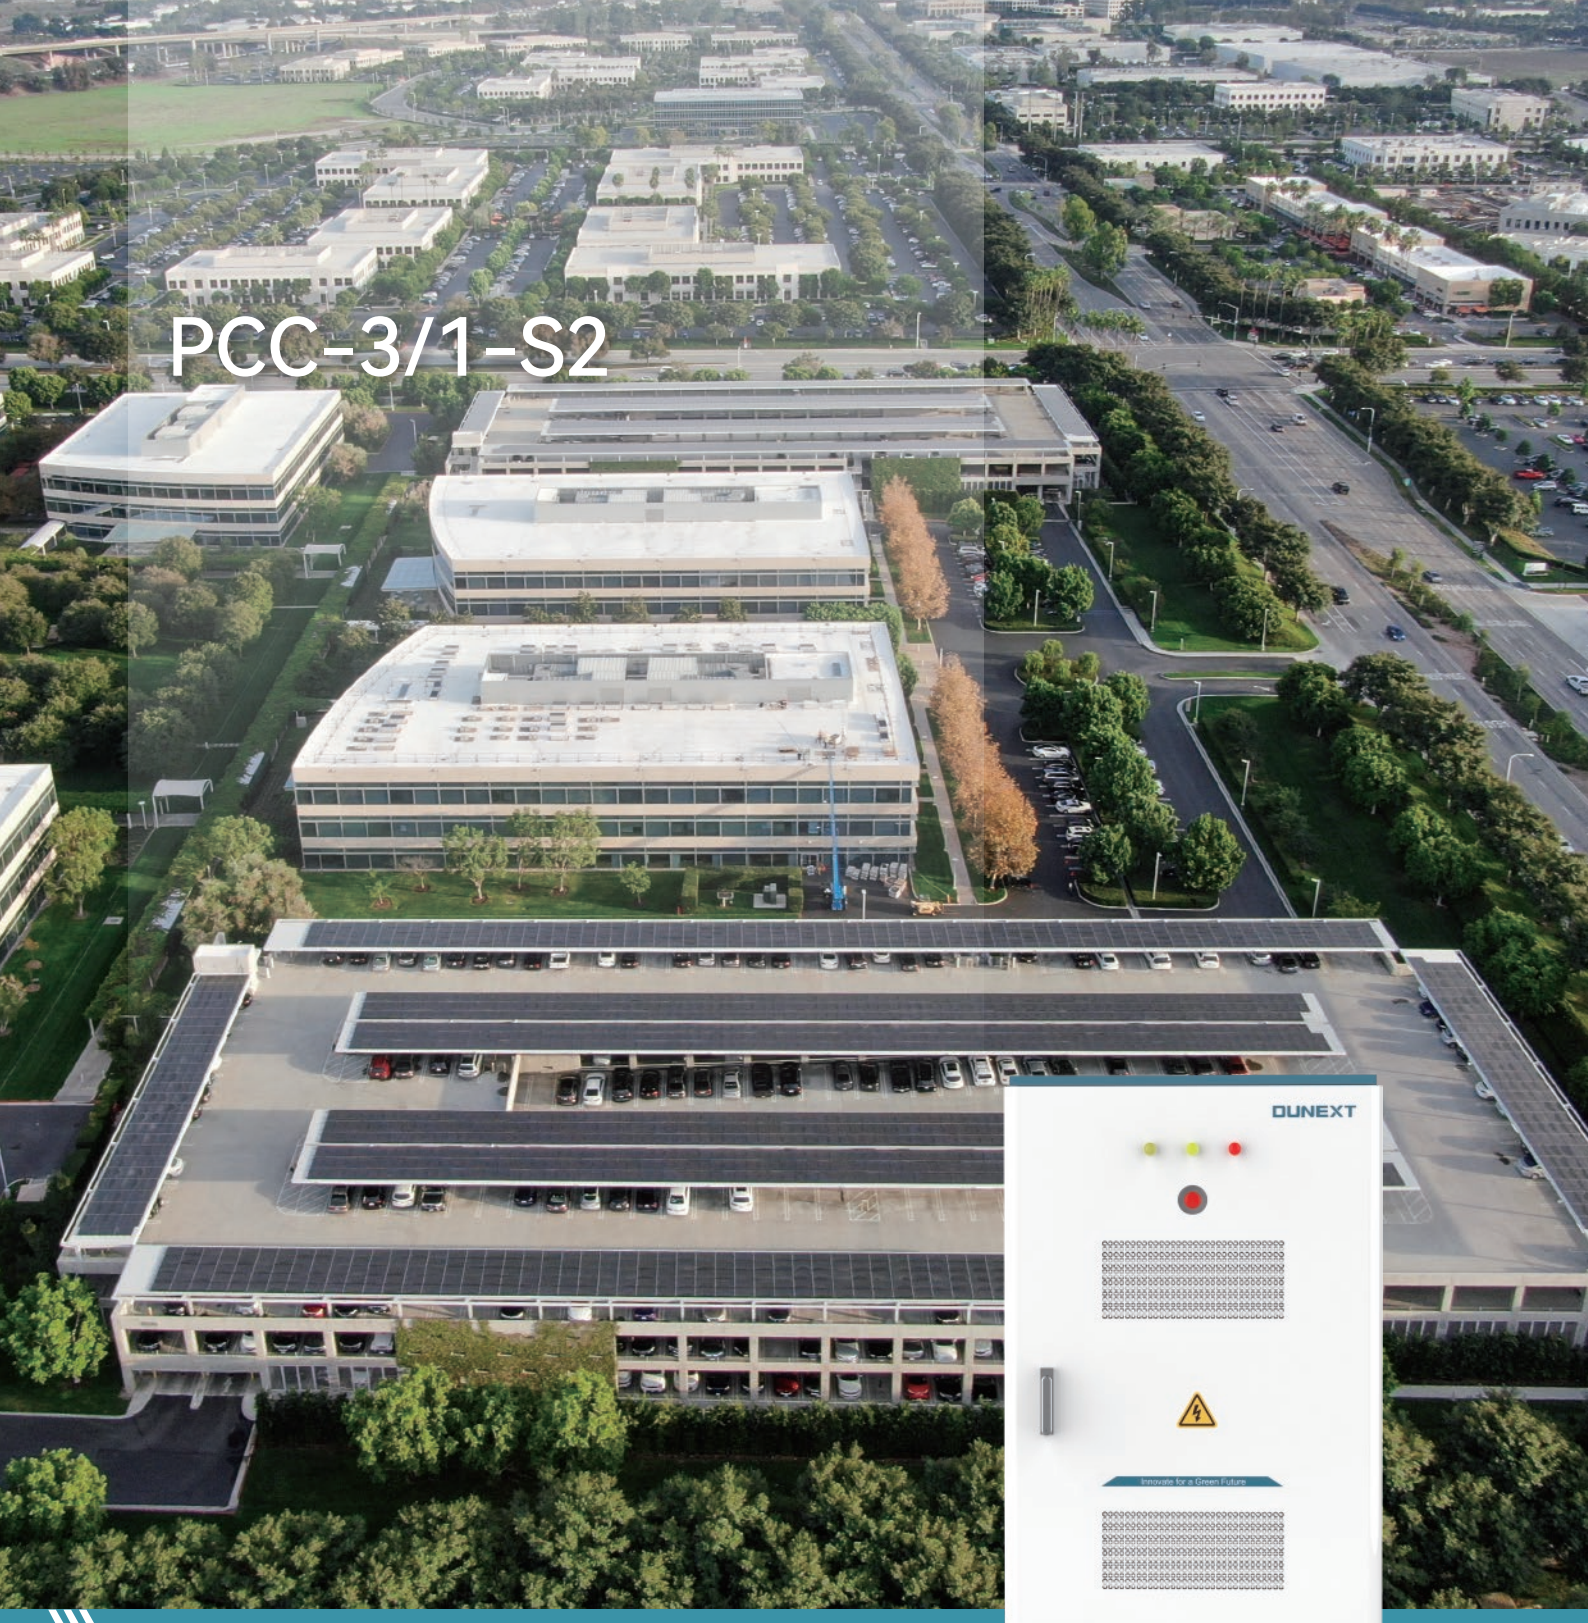

PCC-3/1-S2

Power Control Cabinet

- On/off-grid switching time ≤ 20 ms
- Supports up to 3 energy storage cabinets
- No isolation transformer required
- IP54 outdoor design
- Easy installation and maintenance
- Compact structure, cost-effective solution

Power Control Cabinet

PCC-3/1-S2

Model	PCC-3/1-S2	
Applicable Products	PowerHill 233kWh Series	PowerHill 261kWh Series
Electrical Parameters		
Grid Connection	3P4W + PE	
Rated Grid Voltage [V]	400 AC	
Rated Frequency [Hz]	50	
Automatic Switching Time [ms]	≤20	
Rated Output Current [A]	722	
Grid Input Power [kW]	500	
Max. BESS Input Power [kW]	105*3	125*3
Load Power [kW] ^[1]	≤315	≤375
Protection		
Grid-Side Overvoltage	Yes	
Under Voltage	Yes	
Over Frequency	Yes	
Under Frequency	Yes	
Over Temperature	Yes	
Emergency Stop and Output Overload Protection	Yes	
General Data		
Dimension [W * D * H][mm]	900 * 1030 * 1600	
Max. Weight [kg]	about 340	
Degree of Protection	IP 55	
Cooling	Fan	
Anti-Corrosion Grade	C4	
Ambient Temperature Range [°C] ^[2]	-25 ~ 55	
Relative Humidity [% RH]	0 ~ 95 (No condensing)	
Operating Altitude [m] ^[3]	≤ 2000	
Communication Interface	1 RS485/LAN	
Communication Protocol	Modbus-RTU/Modbus-TCP	
Number of Grid Inputs	1	
Number of BESS Inputs	Max. 3	
Number of Load Inputs	1	

[1] The load power is subject to the connected power of the industrial and commercial energy storage system.

[2] The system power derates above 45°C.

[3] The system derates above 2000 meters.



Power Control Cabinet

-  Second-level on/off-grid switching
-  Support wall-mounted installation
-  Optimized for single-cabinet energy storage systems with high compatibility
-  IP54 outdoor design
-  Cost-effective solution
-  Simplified architecture for easy installation and maintenance

Power Control Cabinet

PCC-1/1-S1

Model	PCC-1/1-S1	
Applicable Products	PowerHill 233kWh Series	PowerHill 261kWh Series
Electrical Parameters		
Grid Connection	3P4W + PE	
Rated Grid Voltage [V]	400 AC	
Rated Frequency [Hz]	50	
Automatic Switching Time [s]	≤25	
Grid Input Power [kW]	250	
Max. BESS Input Power [kW]	105	125
Load Power [kW] ^[1]	≤105	≤125
Protection		
Emergency Stop and Output Overload Protection	Yes	
General Data		
Dimension [W * D * H][mm]	800 * 445 * 800	
Max. Weight [kg]	about 82	
Degree of Protection	IP 55	
Cooling	Fan	
Anti-Corrosion Grade	C4	
Ambient Temperature Range [°C] ^[2]	-25 ~ 55	
Relative Humidity [% RH]	0 ~ 95 (No condensing)	
Operating Altitude [m] ^[3]	≤ 2000	
Communication Interface	LAN (Modbus TCP)	
Number of Grid Inputs	1	
Number of BESS Inputs	1	
Number of Load Inputs	1	
Contains Main Components	IO modules, circuit breakers, contactors, and UPS	
UPS [kVA]	1	

[1] The load power is subject to the connected power of the industrial and commercial energy storage system.

[2] The system power derates above 45°C.

[3] The system derates above 2000 meters.





DN3H Series (25-50KTL)

Three Phase Hybrid Inverter

-  Support 100% unbalanced loads
-  Max. 120% back-up output overloading @60s
-  100A high charge/discharge current support 1C solution
-  Low operating noise < 50dB
-  Low start-up voltage 135V for more generation time
-  Support diesel generators for diverse energy sourcing

Three Phase Hybrid Inverter

DN3H Series(25-50KTL)

Model	DN3H 25KTL-H2	DN3H 30KTL-H2	DN3H 36KTL	DN3H 40KTL	DN3H 50KTL
PV Input					
Max. Recommended PV Power [Wp]	37500	45000	54000	60000	75000
Max. PV Input Voltage [V] ^[1]	1000	1000	1000	1000	1000
Rated PV Input Voltage [V]	620	620	620	620	620
Start-Up Voltage [V]	135	135	135	135	135
No. of MPP Trackers	4	4	4	4	4
No. of Input Strings per Tracker	2	2	2	2	2
MPPT Voltage Range [V] ^[1]	200-850	200-850	200-850	200-850	200-850
Max. Input Circuit per MPPT [A]	30	30	30	30	30
Max. Short-Circuit Current per MPPT [A]	40	40	40	40	40
AC Input / Output (On-Grid)					
Rated AC Power [W]	25000	30000	36000	40000	50000
Max. Output Apparent Power [VA]	27500	33000	39600	44000	55000
Max. Input Apparent Power [VA] ^[2]	30000	36000	43500	48000	60000
Max. AC Current [A]	42	50	60	66	83
Rated AC Voltage [V]	3L / N / PE; 220 / 380; 230 / 400				
Rated Frequency [Hz]	50 / 60				
Output THDi [@Rated Output]	< 3%				
Adjustable Power Factor [cos φ]	0.8 leading ... 0.8 lagging				
DCI	< 0.5%In				
AC Output (Off-Grid)					
Rated AC Power [W]	25000	30000	36000	40000	50000
Max. Output Apparent Power [VA]	27500	33000	39600	44000	55000
Max. Output Current [A]	42	50	60	66	83
Rated AC Voltage [V]	3L / N / PE; 220 / 380; 230 / 400				
Rated Frequency [Hz]	50 / 60				
Automatic Switch Time [ms]	< 20				
Output THDv	< 3%@Linear Load				
Generator Input					
Max. Input Apparent Power [VA] ^[2]	30000	36000	43500	48000	60000
Max. Charging Power of Battery [W]	25000	30000	36000	40000	50000
Rated AC Voltage [V]	3L / N / PE; 220 / 380; 230 / 400				
Rated AC Frequency [Hz]	50 / 60				
Max. Input Current [A]	43.5	52.2	63	69.6	87.0
Battery					
Battery Type	Lithium (with BMS)				
Battery Voltage Range [V]	135 ~ 750				
Max. Charging / Discharging Current [A]	100 / 100				
Efficiency					
Max. Efficiency	98.8%				
European Efficiency	98.3%				
Protection					
DC Reverse Polarity Protection	Yes				
Battery Input Reverse Connection Protection	Yes				
Insulation Resistance Protection	Yes				
Surge Protection	Yes				
Over-Temperature Protection	Yes				
Residual Current Protection	Yes				
Anti-Islanding Protection	Yes				
AC Over-Voltage Protection	Yes				
Overload Protection	Yes				
AC Short-Circuit Protection	Yes				
General Data					
Dimension [W * H * D] [mm]	800 * 620 * 300				
Weight [kg]	72				
Over Voltage Category	PV: II Main: III				
Operating Temperature [°C]	-30 ~ 60				
Operating Altitude [m]	3000 ^[3]				
Relative Humidity [%]	0 ~ 100				
Topology	Transformerless				
Cooling	Fan				
Degree of Protection	IP65				
Standby Self-Consumption [W]	< 15				
Noise Level [dB(A)] ^[1]	< 50				
Display	OLED & LED				
Communication	CAN, RS485, WiFi / LAN (Optional)				
Certifications & Standards					
Grid Connection Standards	EN IEC 61000, EN IEC 62109, EN 50549-1, CEI-021				

[1] PV Max. Input voltage is 850V, otherwise inverter will be waiting;
[2] Max. apparent power from the grid refers to the highest power imported from the utility grid, utilized for supporting backup loads and charging the battery;
[3] The system will be derated when the altitude is above 3000m.



DN3H-H3 Series (25-50K)

Three Phase Hybrid Inverter

-  150A high charge/discharge current
-  Support 100% unbalanced loads
-  150-940V wide battery voltage range
-  20A PV input current per string, 4 MPP trackers
-  Max. 10 pcs parallel operation
-  Support diesel generators for diverse energy sourcing

Three Phase Hybrid Inverter		DN3H-H3 Series(25-50K)		
Model	DN3H-25K-H3	DN3H-30K-H3	DN3H-40K-H3	DN3H-50K-H3
PV Input				
Max. Recommended PV Power [Wp]	50000	60000	80000	100000
Max. PV Input Voltage [V] ^[1]	1000	1000	1000	1000
Rated PV Input Voltage [V]	620	620	620	620
Start-Up Voltage [V]	135	135	135	135
No. of MPP Trackers	4	4	4	4
No. of Input Strings per Tracker	2	2	2	2
Operating Voltage Range [V] ^[1]	200 - 950	200 - 950	200 - 950	200 - 950
Max. Input Circuit per MPPT [A]	40	40	40	40
Max. Short-Circuit Current per MPPT [A]	50	50	50	50
AC Input / Output (On-Grid)				
Rated AC Output Power [W]	25000	30000	40000	50000
Max. Output Apparent Power [VA]	25000	30000	40000	50000
Rated AC Voltage [V]	3L / N / PE; 220 / 380; 230 / 400			
Rated Frequency [Hz]	50 / 60			
Rated Output Current [A]	37.9 / 36.2 / 34.7	45.5 / 43.5 / 41.7	60.6 / 58 / 55.6	75.8 / 72.5 / 69.4
Max. Output Current [A]	37.9	45.5	60.6	75.8
Adjustable Power Factor [cos φ]	0.8 Leading ... 0.8 Lagging			
Output THDi [@Rated Output]	< 3%			
Max. Input Apparent Power [VA] ^[2]	50000	60000	80000	80000
Max. Input Current [A]	75.8	90.9	121.2	121.2
AC Output (Off-Grid)				
Rated AC Power [W]	25000	30000	40000	50000
Rated Output Current [A]	37.9 / 36.2 / 34.7	45.5 / 43.5 / 41.7	60.6 / 58 / 55.6	75.8 / 72.5 / 69.4
Rated AC Voltage [V]	3L / N / PE; 220 / 380; 230 / 400			
Rated Frequency [Hz]	50 / 60			
Automatic Switch Time [ms]	< 10			
Peak Output Apparent Power [VA]	1.5 Times Of Rated Output Power,10s			
Output THDv	< 3%@Linear Load			
Generator Input				
Max. Input Apparent Power [VA]	25000	30000	40000	50000
Rated AC Voltage [V]	3L / N / PE; 220 / 380; 230 / 400			
Rated AC Frequency [Hz]	50 / 60			
Max. Input Current [A]	37.9	45.5	60.6	75.8
Battery				
Battery Type	Lithium (with BMS)			
Battery Voltage Range [V]	150 - 840			
Max. Charging / Discharging Current [A]	150 / 150			
Max. Charge / Discharge Power [W]	25000 / 25000	30000 / 30000	40000 / 40000	50000 / 50000
Efficiency				
Max. Efficiency	97.8%			
European Efficiency	97.2%			
Protection				
DC Reverse Polarity Protection	Yes			
Battery Input Reverse Connection Protection	Yes			
Insulation Resistance Protection	Yes			
Surge Protection	DC Type II / AC Type II			
Over-Temperature Protection	Yes			
Residual Current Protection	Yes			
Anti-Islanding Protection	Yes			
AC Over-Voltage Protection	Yes			
Overload Protection	Yes			
AC Short-Circuit Protection	Yes			
General Data				
Dimension [W * H * D] [mm]	919 * 739 * 305			
Weight [kg]	89			
Over Voltage Category	PV+Battery: II; Mains: III			
Operating Temperature [°C]	-30 ~ 60			
Operating Altitude [m]	3000			
Relative Humidity [%]	0 ~ 100			
Topology	Transformerless			
Cooling	Fan			
Degree of Protection	IP66			
Standby Self-Consumption [W]	< 40			
Noise Level [dB(A)] ^[1]	< 65			
Display	OLED & LED			
Communication	CAN, RS485			
Certifications & Standards				
Grid Connection Standards	EN IEC 61000, EN IEC 62109, EN 50549-1, NC RfG, G99, G100			

[1] PV Max. Input voltage is 950V, otherwise inverter will be waiting;
[2] Max apparent power means the maximum power imported from the grid used to satisfy the backup loads and charge the battery.



DN-EMS300

Energy Management System

- Local monitoring & remote O&M
- Support for multiple application scenarios
- Flexible modular configuration for fast project deployment
- Built-in WiFi for local commissioning & maintenance
- Guided one-click commissioning
- AI-based intelligent energy dispatch & dynamic tariff adaptation


Energy Management System

DN-EMS300

Model	DN-EMS300
System	
Controller Functions	Dynamic Tariff Optimization, TOU Optimization, Self-Consumption, Dynamic Capacity Expansion, Feed-in Limitation, Demand Control, On/Off-Grid Switching
Communication	
RS485 Interface	8 Ports
Ethernet Port	4 x 10/100/1000Mbps
CAN	3 Ports
4G Module	Multi-Carrier Support, EU Version (Optional)
Wi-Fi	1 Ports, Supports 2.4G/5.8G
Communication Protocol	Modbus RTU/TCP, MQTT, IEC 60870-5-104, DLT64-5 2007
TF Card	1 slot, supports up to 128 GB
M.2	1 slot, SATA SSD supported, up to 256 GB
I/O Interface	
DI / DO	18 Channels / 10 Channels (DI: 1-4 Are Wet Contacts, 5-18 Are Dry Contacts)
AI	4 Channels (0 ~ 10 VDC, 4 ~ 20 mA)
General Parameters	
Dimensions [W * H * D][mm]	230 * 50 * 114
Weight [kg]	1.25
Degree of Protection	IP20
Operating Temperature [°C]	-40 ~ +85
Altitude [m]	≤2000
Relative Humidity	0% ~ 95% (Non-Condensing)
Power Supply [DC Input]	24 VDC (±10%)
Certifications & Standards	
Certifications	CE, RoHS

DuLink

Smart Energy Management
Cloud Platform

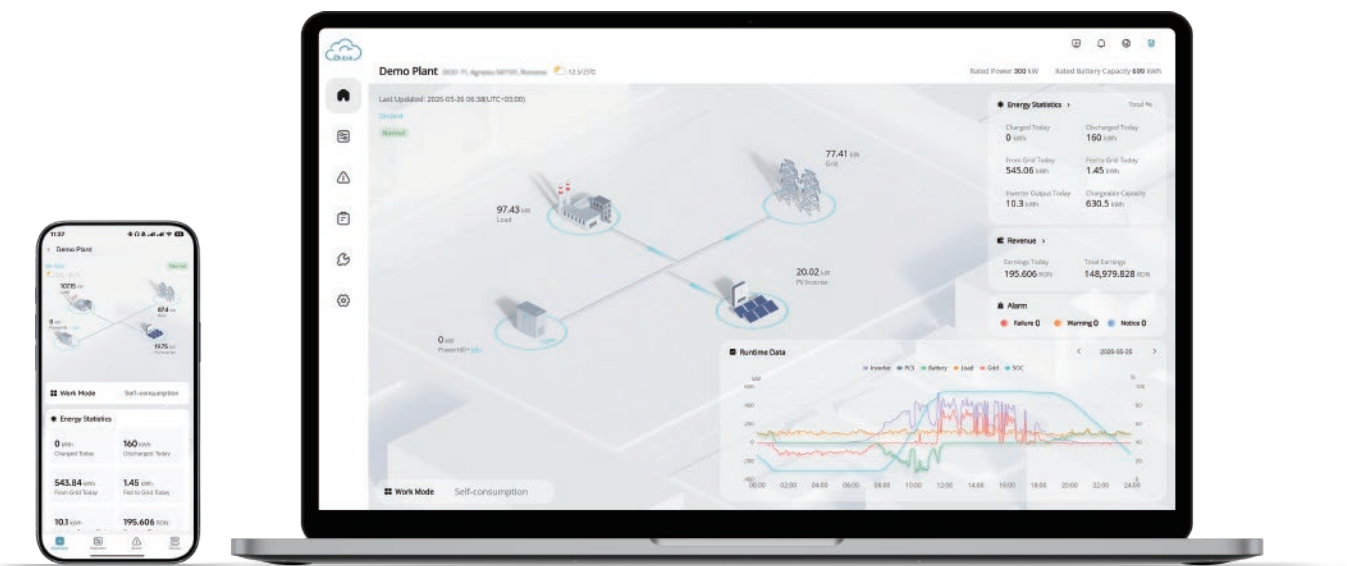

Clear & User-Friendly Interface


- ◆ Intuitive Energy Flow
- ◆ Dual interface (Web & APP)
- ◆ Multiple languages

Efficient Multi-Site Management

- ◆ Unified Platform
- ◆ Summary & Details (Multi-Dimensional)
- ◆ Smart Filtering

Precision Monitoring & Alert

- ◆ Cell-Level Precision Monitoring
- ◆ Minute-Level Data Updates
- ◆ Visual Alarm Display

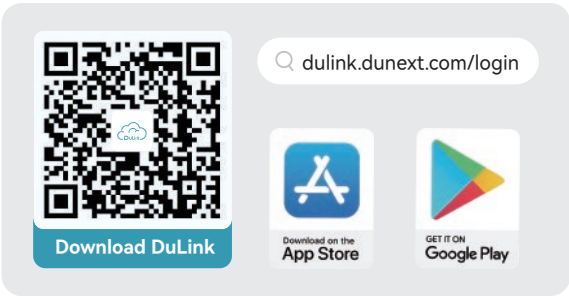


An AI trader for your energy storage system

✦ Open API

✦ Dynamic Tariff Ready

✦ AI Inside

✦ Control.Not Just Charts

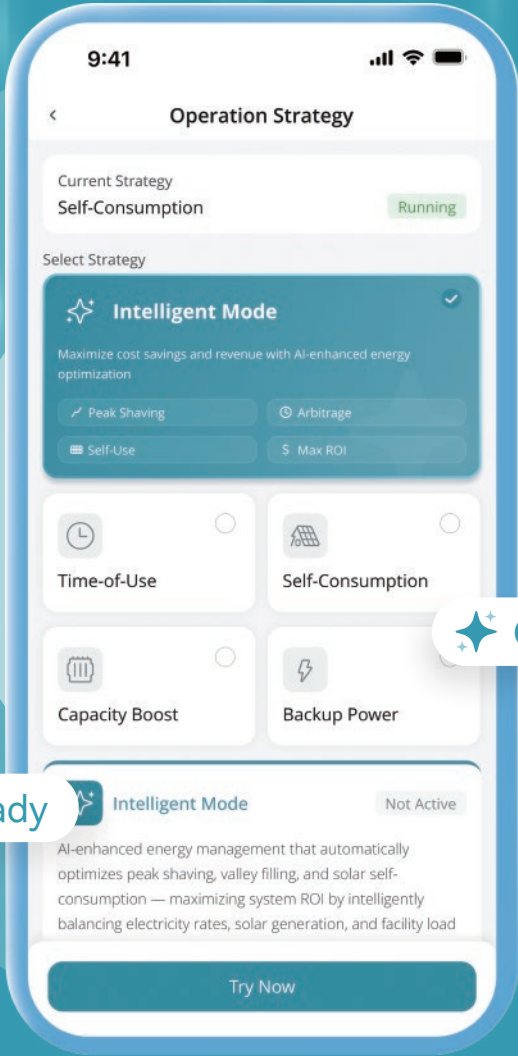

DuLink



Expert in C&I and Utility BESS

Global Cases



Village Borets , Bulgaria Battery capacity: 233 kWh



Wales, UK Battery capacity: 466 kWh



Plovdiv, Bulgaria Battery capacity: 1864 kWh



Petrich, Bulgaria Battery capacity: 932 kWh



Targu Mures, Romania Battery capacity: 466 kWh



Targu Jiu, Romania Battery capacity: 233 kWh



Sofia, Bulgaria Battery capacity: 233 kWh



Sofia, Bulgaria Battery capacity: 699 kWh

Expert in C&I and Utility BESS Global Cases



Groß-Schweinbarth, Austria Battery capacity: 466 kWh



Voivoda, Bulgaria Battery capacity: 233 kWh



Plovdiv, Bulgaria Battery capacity: 233 kWh



Tutrakan, Bulgaria Battery capacity: 2150 kWh



Targu Mures, Romania Battery capacity: 233 kWh



Bytom, Poland Battery capacity: 1505 kWh



Pomorie, Bulgaria Battery capacity: 215 kWh



Chichester, UK Battery capacity: 215 kWh

Expert in C&I and Utility BESS

Global Cases



Kolwezi, DR Congo Battery capacity: 215 kWh



Suceava, Romania Battery capacity: 645 kWh



Cluj, Romania Battery capacity: 20 MWh



Schörfling am Attersee, Austria Battery capacity: 6 MWh



Targu Jiu, Romania Battery capacity: 645 kWh



Pomorie, Bulgaria Battery capacity: 430 kWh



Anhui, China Battery capacity: 65 MWh



Jinchang, China Battery capacity: 80 MWh

YOUR BEST PARTNER

1

Convenience

Dedicated to delivering convenient products and solutions, providing customers with prompt and professional services

3

More Values

Creating and sharing value together with our customers and partners

Safety

Committed to providing safe products and solutions with comprehensive lifecycle services to ensure the security of customer assets

2

Stability

Stable products and solutions, steadfast business relationships, enabling customers to achieve consistent returns

4